



OMAN
FASTENERS

Quality Engineered
Steel Nails

2013 PRODUCT BROCHURE



2	Table of Contents
3	Oman Fasteners Quality & Service
4	Manufacturing Competency
5	Collated Nails
6	Plastic Strip Nails
7	Wire Collated Nails
8	Paper Tape Nails
9	Joist Hanger / Hardware Nails
10	Plastic Sheet Siding Nails
11	Bulk Nails



Oman Fasteners

Manufacturer of Quality Engineered Steel Nails

Quality and Service


Choosing the right supply partner is essential to promoting the integrity of your business. Oman Fasteners differentiates itself with an absolute commitment to Quality and Service. Our nails are engineered to exacting specifications and we've earned industry wide confidence by placing the highest value on quality and service. We guarantee our products to be free from defect and we assure that your order arrives accurately, with precise timeliness. Our Atlanta, GA based office is available at any time to promptly provide information and address your needs.

Our product range includes every collation type and is complemented by complete array of finish types including Bright, Electro-galvanized, Hot Dip Galvanized, Vinyl Coated, and Stainless Steel.

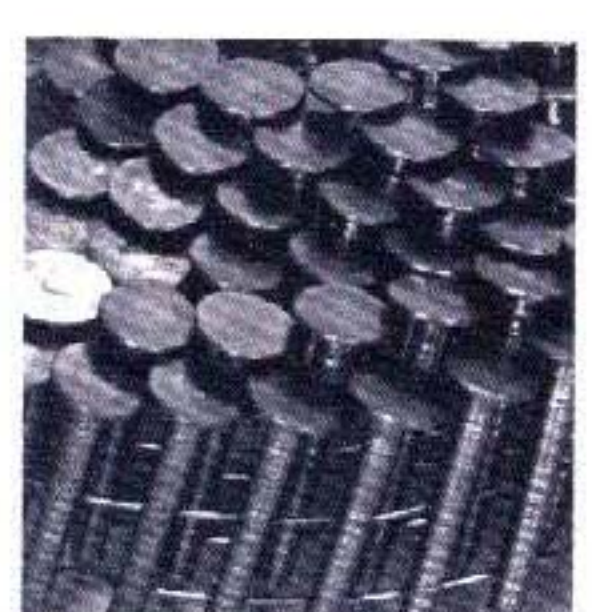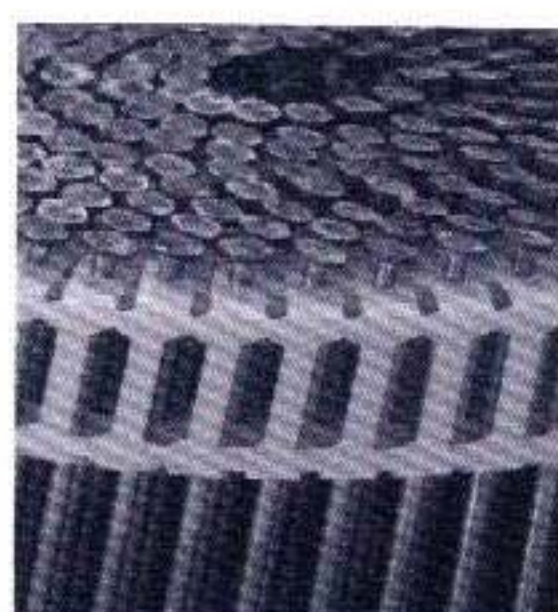



QUALITY COMMITMENT

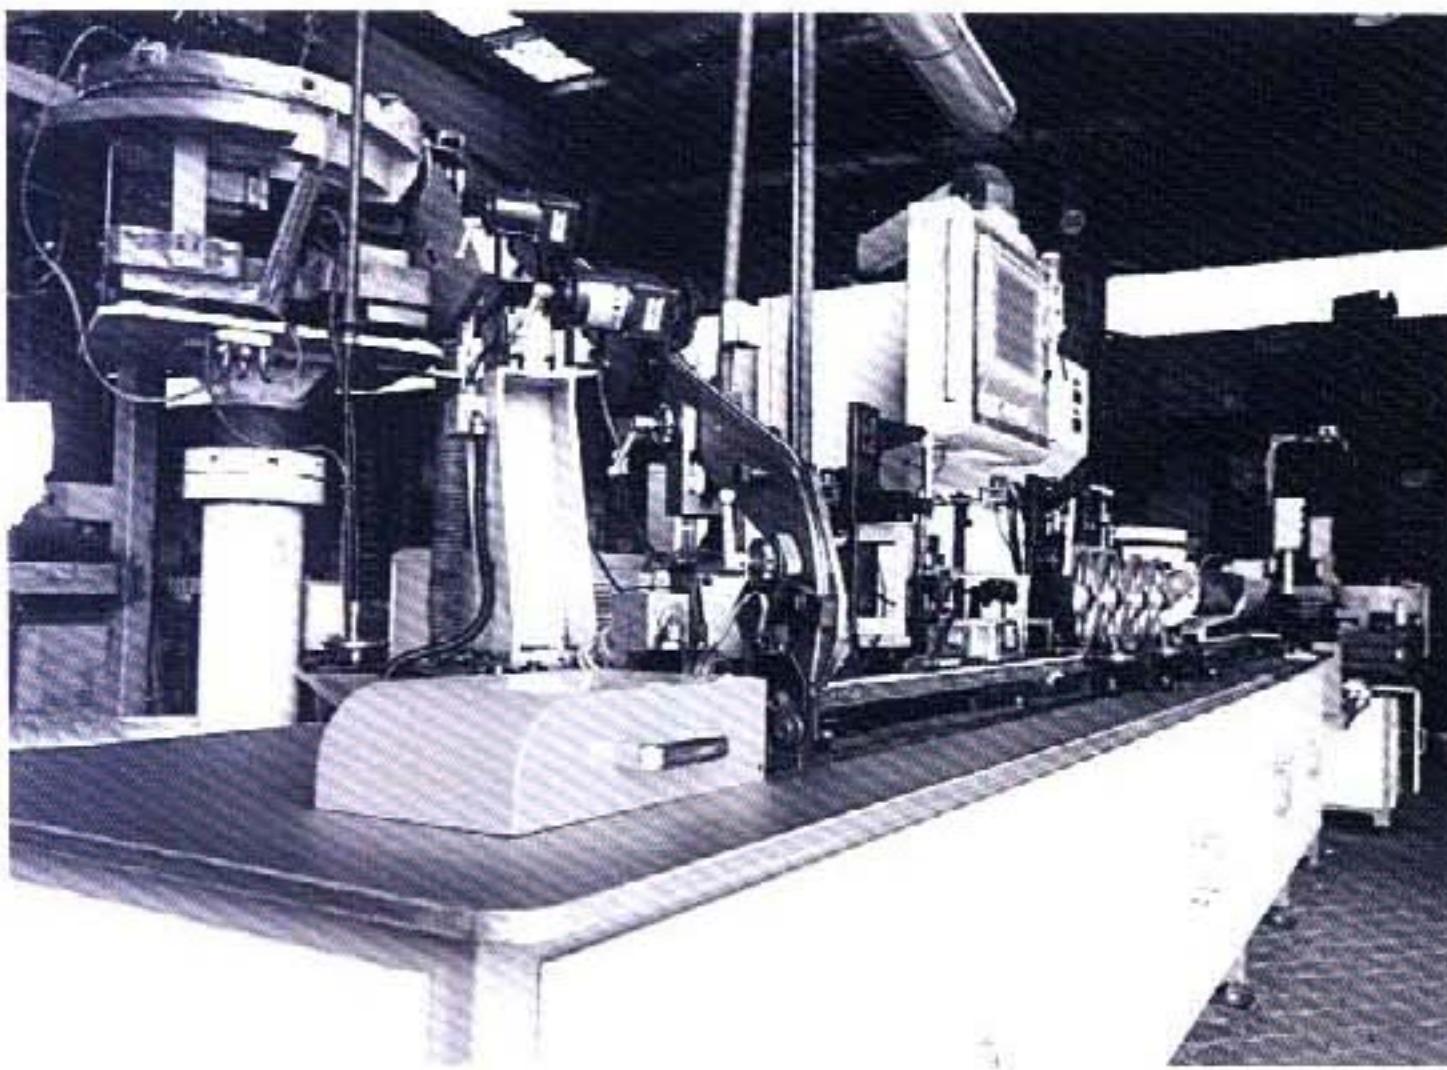

Oman Fasteners utilizes state of the art equipment and technology through every step of the manufacturing process

OMAN FASTENERS utilizes state of the art equipment and technology through every step of the manufacturing process. Quality is constantly monitored and strict production records are kept in accordance with ISO and ICC ES standards. Our production facilities and processes are regularly audited for compliance by our internal Quality Assurance Team.

We keep capacity ahead of demand in order to maintain standard setting lead-times as our business continues to grow.

We continually invest in the latest technology to improve production efficiency allowing us to produce at the highest levels of quality and the lowest possible cost.

OMAN FASTENERS maintains its own ICC ES evaluation report - ESR 3434

NAIL HEAD TYPES



FULL ROUND HEAD



CLIPPED HEAD



FULL ROUND HEAD OFFSET

NAIL SHANK TYPES



SMOOTH

Most common, enough holding power for most uses



RING

For superior holding power over smooth shank



SCREW

Nail turns like a screw as it is driven to prevent splitting

NAIL POINT TYPES



BLUNT DIAMOND

Reduces splitting



DIAMOND

Easy drivability, prevents splitting in soft woods

FINISH TYPES

BRIGHT

No coating. Recommended only for indoor use.

ELECTRO GALVANIZED

Steel electroplated with zinc to provide minimal corrosion resistance

HOT DIPPED GALVANIZED

Steel dipped in zinc to provide excellent corrosion resistance for exterior use

VINYL COATED

For ease of drivability and better holding power

STAINLESS STEEL

Highest corrosion resistance for use in treated lumber, cedar and coastal areas

TYPES OF COLLATION


21° Plastic Strip

- Framing
- Trusses
- Subfloor
- Roof Decking
- Wall Sheathing



33° Paper Tape

- Framing
- Trusses
- Subfloor
- Roof Decking
- Wall Sheathing

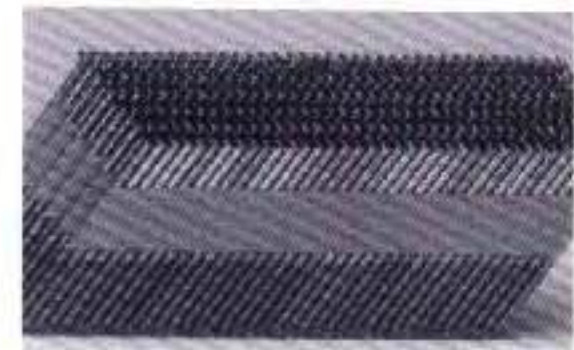

28° Wire Weld

- Framing
- Trusses
- Subfloor
- Roof Decking
- Wall Sheathing



36° Paper Tape

- Joist Hangers
- Hardware



15° Wire Coil

- Framing
- Wall Sheathing
- Subfloor
- Roof Decking
- Exterior Deck



15° Wire Coil

- Roofing



0° & 15° Plastic Sheet

- Siding
- Fencing



21° PLASTIC STRIP

PRIMARY APPLICATION


Framing, Sheathing, Decking, Crating

FINISH TYPES

Bright, Electro Galvanized, Hot Dipped Galvanized,
Vinyl Coated, Stainless Steel

Length	Diameter	M's/Ctn	Ctns/Pkt	Approx. Ctn Wt (lbs.)
1-1/2"	.148	5	48	34.90
2"	.113	6	48	34.90
2-1/8"	.148	4	48	42.00
2-1/4"	.148	4	48	44.31
2-3/8"	.113	5	48	34.24
2-3/8"	.148	4	48	46.65
2-1/2"	.113	5	48	41.95
2-1/2"	.120	4	48	36.13
2-1/2"	.131	5	48	47.93
2-1/2"	.162	4	48	58.79
2-3/4"	.120	4	48	36.13
2-3/4"	.135	4	48	44.99
3"	.120	4	48	38.67
3"	.131	4	48	45.70
3"	.148	4	48	59.19
3-1/4"	.120	4	48	42.81
3-1/4"	.131	4	48	49.54
3-1/4"	.135	4	48	53.44
3-1/4"	.148	3	48	51.68
3-1/4"	.162	3	48	59.06
3-1/2"	.131	4	48	52.80
3-1/2"	.135	4	48	54.10
3-1/2"	.162	3	48	58.53

Meets or exceeds FN1667

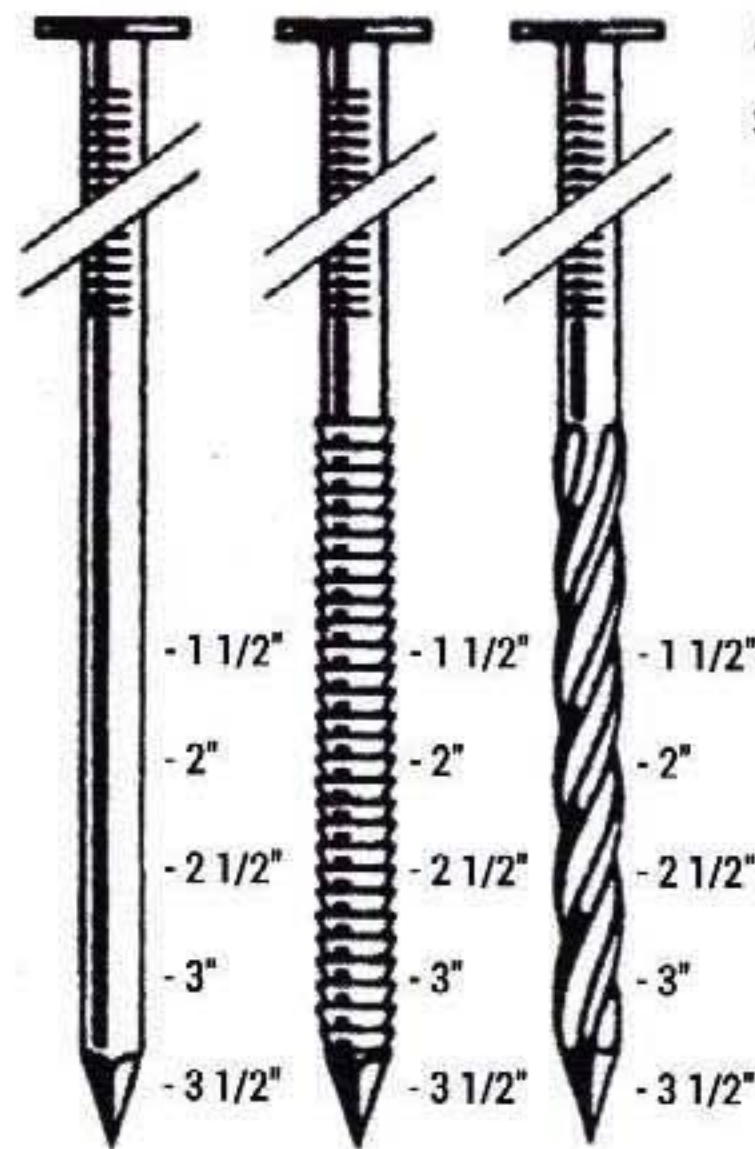

ALL SIZES AVAILABLE IN
Smooth, Ring and Screw Shanks

Smooth Ring Screw

FOR USE IN THE FOLLOWING NAILERS:

Hitachi	NR83A, NR83A2, NR83A3, NR90AC2, NR90AC3, NR90AE, NR90GR, NR90GR2	
Bostitch	N95RHN	
Craftsman	18365, 18436	
DeWalt	D51845	
DuoFast	CN350B, NSP350F, NSP350F1	
Makita	AN8300, AN922	
Max	SN890RH, SN80, SN90	
Paslode	F450SRH, 5325SRH, 5320SRH-20	
Porter Cable	FR350, FR350MAG	
Senco	SN60, SN65, SN65C, 600FRH, 602, 652, 700XLFRHM 750XLFRH	

15° WIRE COIL / 15° WIRE COIL SIDING

PRIMARY APPLICATION


Framing, Sheathing, Decking, Siding, Crating, Pallet Manufacturing

FINISH TYPES

Bright, Electro Galvanized, Hot Dipped Galvanized, Vinyl Coated, Stainless Steel, Hardened



Length	Diameter	M's/Ctn	Ctns/Plt	Approx. Ctn Wt (lbs).
1-1/4"	.086	18	45	45.78
1-1/4"	.092	3.6	48	8.75
1-1/2"	.086	15	45	43.67
1-1/2"	.092	3.6	48	10.49
1-3/4"	.086	13.5	45	45.44
1-3/4"	.092	3.6	60	12.59
1-3/4"	.099	9	40	36.50
2"	.086	10.8	45	42.67
2"	.092	3.6	60	14.40
2"	.099	9	40	41.42
2"	.113	5	56	29.08
2-1/4"	.092	3.6	60	16.20
2-1/4"	.099	9	40	46.58
2-1/4"	.113	4.5	48	29.19
2-3/8"	.099	9	40	49.12
2-3/8"	.113	5	48	34.24
2-3/8"	.131	5	48	46.12
2-1/2"	.092	3.6	60	18.03
2-1/2"	.099	5	48	28.78
2-1/2"	.113	4.5	56	32.74
2-1/2"	.131	4.5	48	43.14
2-3/4"	.099	5	40	28.77
2-3/4"	.113	5	48	38.41
3"	.120	4	45	38.67
3"	.131	4	45	45.70
3-1/4"	.120	4	45	42.81
3-1/4"	.131	4	45	49.54

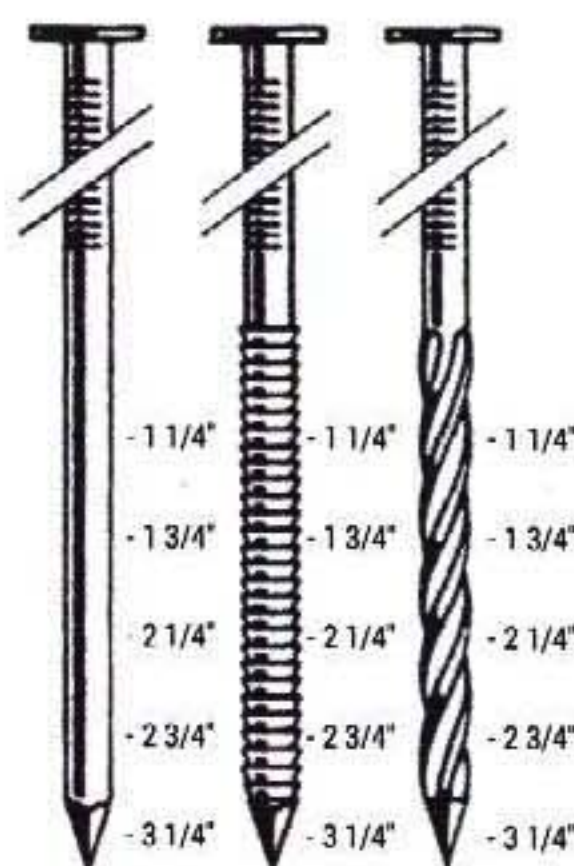

Smooth Ring Screw

ALL SIZES AVAILABLE IN
Smooth, Ring and Screw Shanks

FOR USE IN THE FOLLOWING NAILERS:

Hitachi	NV50AE, NV65AB, NV65AC, NV65AH, NV75AG, NV83A2, NV83A3, NV83A4, NV90AG
Atro	ROLL75, ROLL85, ROLL700, RHC900, RHC1000
Basso	NC-83H
Bea	T0501, T-701
Bostitch	N63CP, N55C, N100C, N80C, N70C, N86C, N80CB, N55C
Fasco	F5C-CN15W-65CT, F5-CN-15W-75CT, F5-CN-15W-90CT
Grex	CN70, CN90
Grip-Rite	GRPCF325
Makita	AN901, AN621
Max	CN55, CN502, CN565, CN56D, CN665
Paslode	4275CN-70, 5325CN-80, F275C, F325C
Porter Cable	COIL 250, COIL 350
Senco	SCN 300(75), SCN60, SCN65
Spotnail	YCN83, MCW64
Stantech	SDCN12B-1, SDCN12B-2
Techikawa	TN-650, TN500
Unicatch	UNC325



33° PAPER TAPE (Available in Clipped & Full Round Offset Head)

PRIMARY APPLICATION



Floor & Wall Framing, Truss Build Up, Window Build Up, Subfloor, Roof Decking, Wall Sheathing, etc.

FINISH TYPES

Bright, Electro Galvanized, Hot Dipped Galvanized, Vinyl Coated, Stainless Steel

Length	Diameter	M's/Ctn	Ctns/Plt	Approx. Ctn Wt (lbs).
2"	.113	4.8	48	31.30
2"	.120	4.8	80	30.84
2-3/8"	.113	4.8	80	32.36
2-3/8"	.120	4.8	80	36.86
2-1/2"	.131	2.5	84	23.94
2-3/4"	.120	4.8	80	41.00
3"	.120	2.5	84	23.85
3"	.131	2.5	84	28.00
3-1/4"	.120	2.5	84	26.12
3-1/4"	.131	2.5	84	31.13
3-1/2"	.131	2.5	84	37.13

Also available in 28 Degree Wire Weld Strip Collation

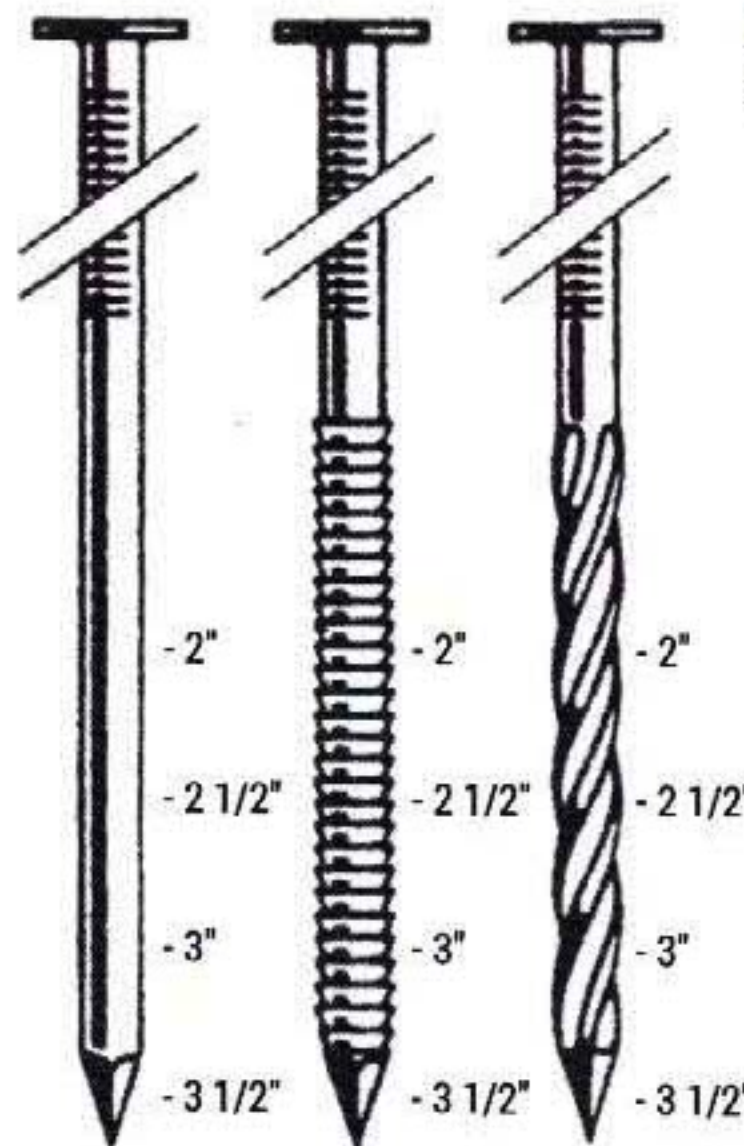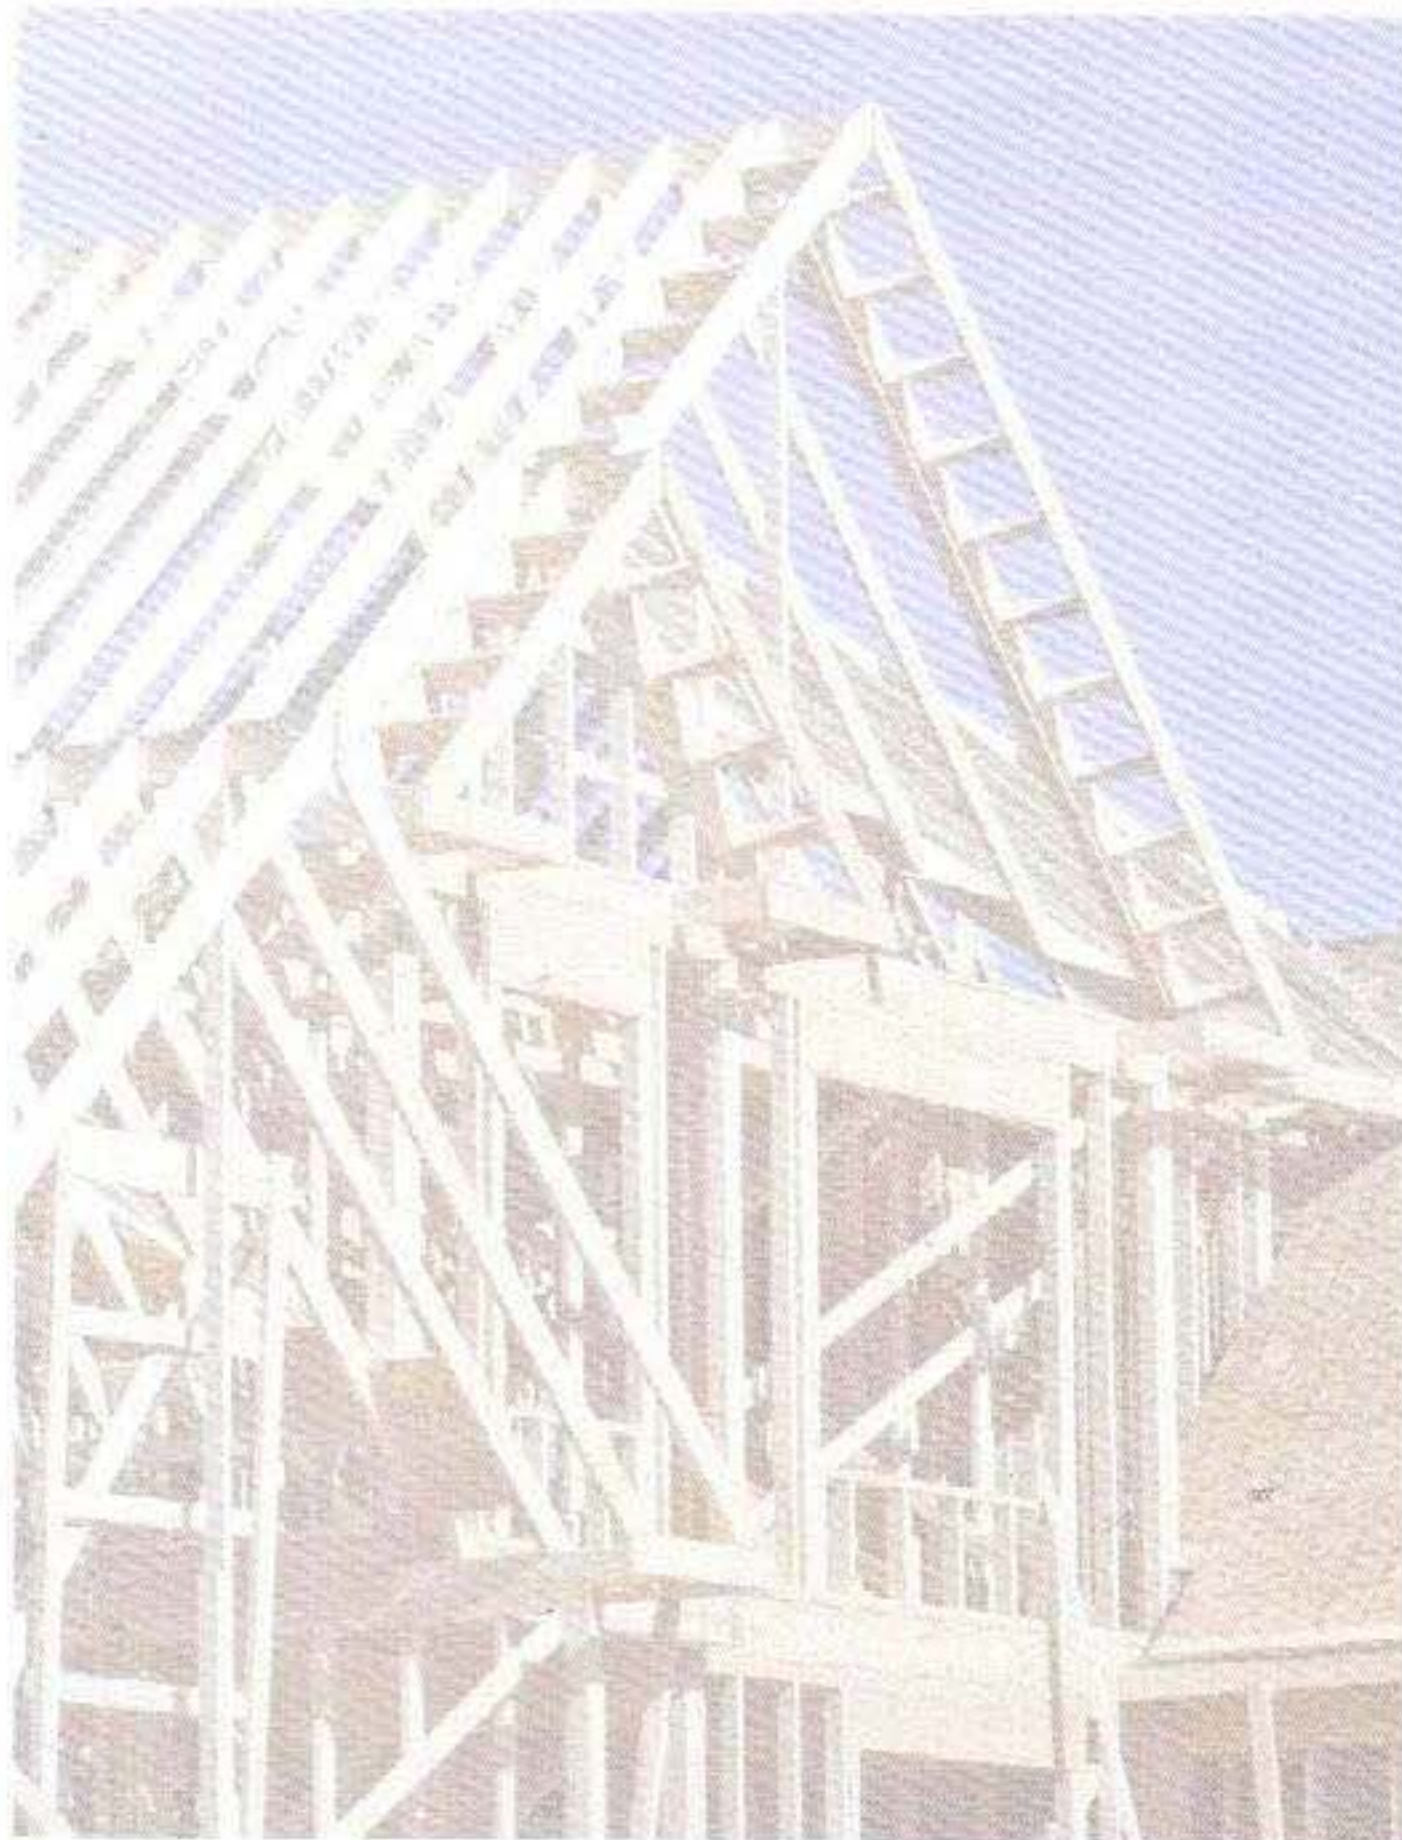

ALL SIZES AVAILABLE IN Smooth, Ring and Screw Shanks

Smooth Ring Screw

FOR USE IN THE FOLLOWING NAILERS:

Hitachi	NR83AA, NR83AA2, NR83AA3, NR83AA4, NR90AD, NR90GC, NR90GC2	
Bostitch	N90PT	
DeWalt	D51823	
DuoFast	CN25B	
Makita	AN942	
Paslode	F350S, 5300S, F3255, S250S, SK312, IM325, IM350	
Porter Cable	FC350	
Senco	SN2, SN3, SN325, SN4, SN70, 600E, 650, 700XL, 750XL	

36° PAPER TAPE JOIST HANGER



PRIMARY APPLICATION

Framing, Wall Sheathing, Subfloor, Roof Decking and Exterior Deck

FINISH TYPES

Bright, Electro Galvanized, Hot Dipped Galvanized, Vinyl Coated, Stainless Steel

Length	Diameter	M's/Ctn	Ctns/Plt	Approx. Ctn Wt (lbs).
1-1/2"	.131	4	96	26.01
1-1/2"	.148	3	96	22.20
2-1/2"	.131	2.5	96	24.16
2-1/2"	.148	2.5	96	29.01
2-1/2"	.162	2	96	25.20

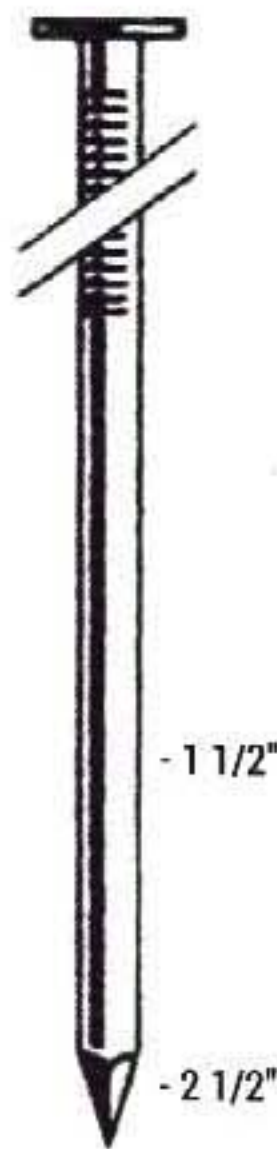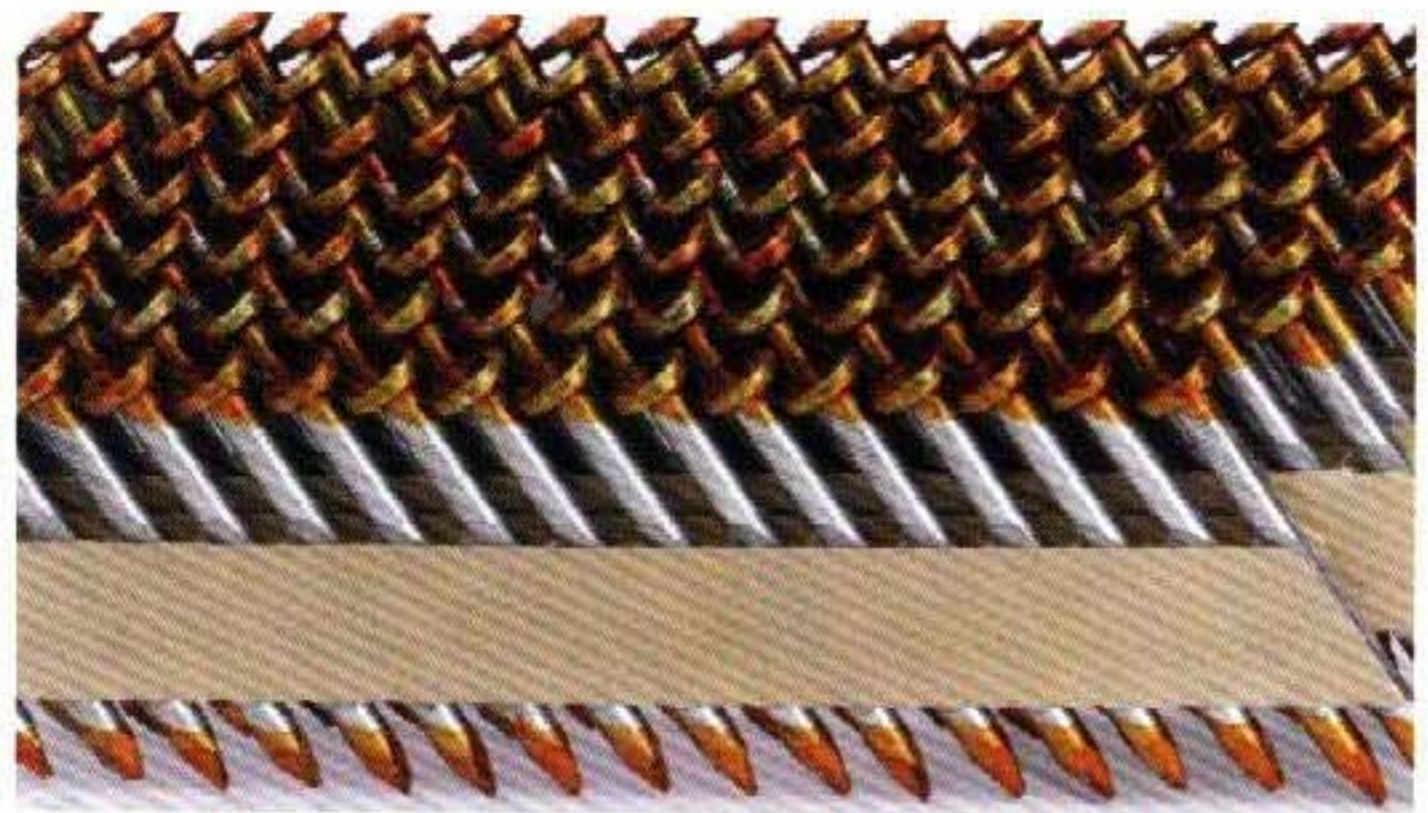

Finish Ref. Code	Code Description	Material
HBR	Hardened Bright Basic	Carbon Steel with a minimum Bend Yield Strength of 130,000 psi for diameter \leq 0.142" and 115,000 psi for diameter \geq 0.142" per ASTM F1667
HEG	Hardened EG	
HHDG	Hardened Hot Dip Galv	
SS	Stainless Steel	Stainless steel wire AISI 304 -1/2 hard

ALL SIZES AVAILABLE
with Stamped Head Identification

Smooth

FOR USE IN THE FOLLOWING NAILERS:

Hitachi NR65AK, NR65AKS
Paslode 5250/65SPP



0° & 15° PLASTIC SHEET COIL



PRIMARY APPLICATION

Siding

FINISH TYPES

Bright, Electro Galvanized, Hot Dipped Galvanized, Vinyl Coated, Stainless Steel

Length	Diameter	M's/Ctn	Ctns/Plt	Approx. Ctn Wt (lbs).
1-3/4"	.086	6	30	21.67
1-7/8"	.099	6	30	29.00
2"	.092	6	30	28.17
2-1/4"	.092	4.8	30	25.17
2-1/2"	.092	4.8	30	27.16

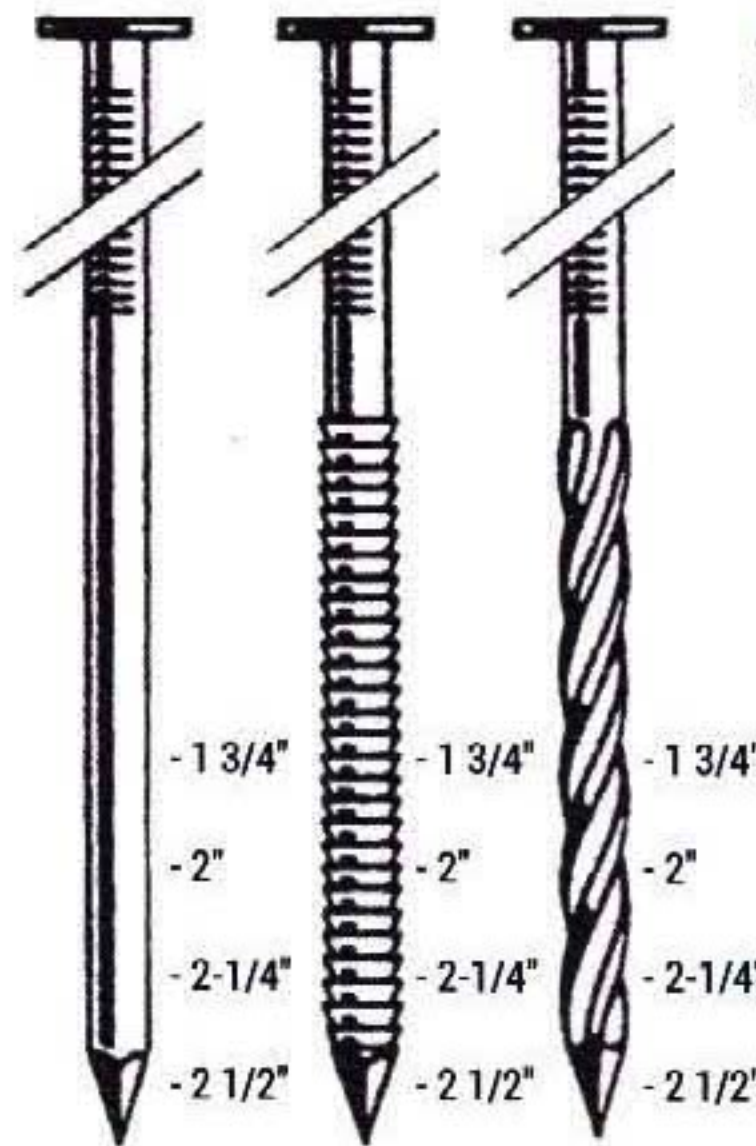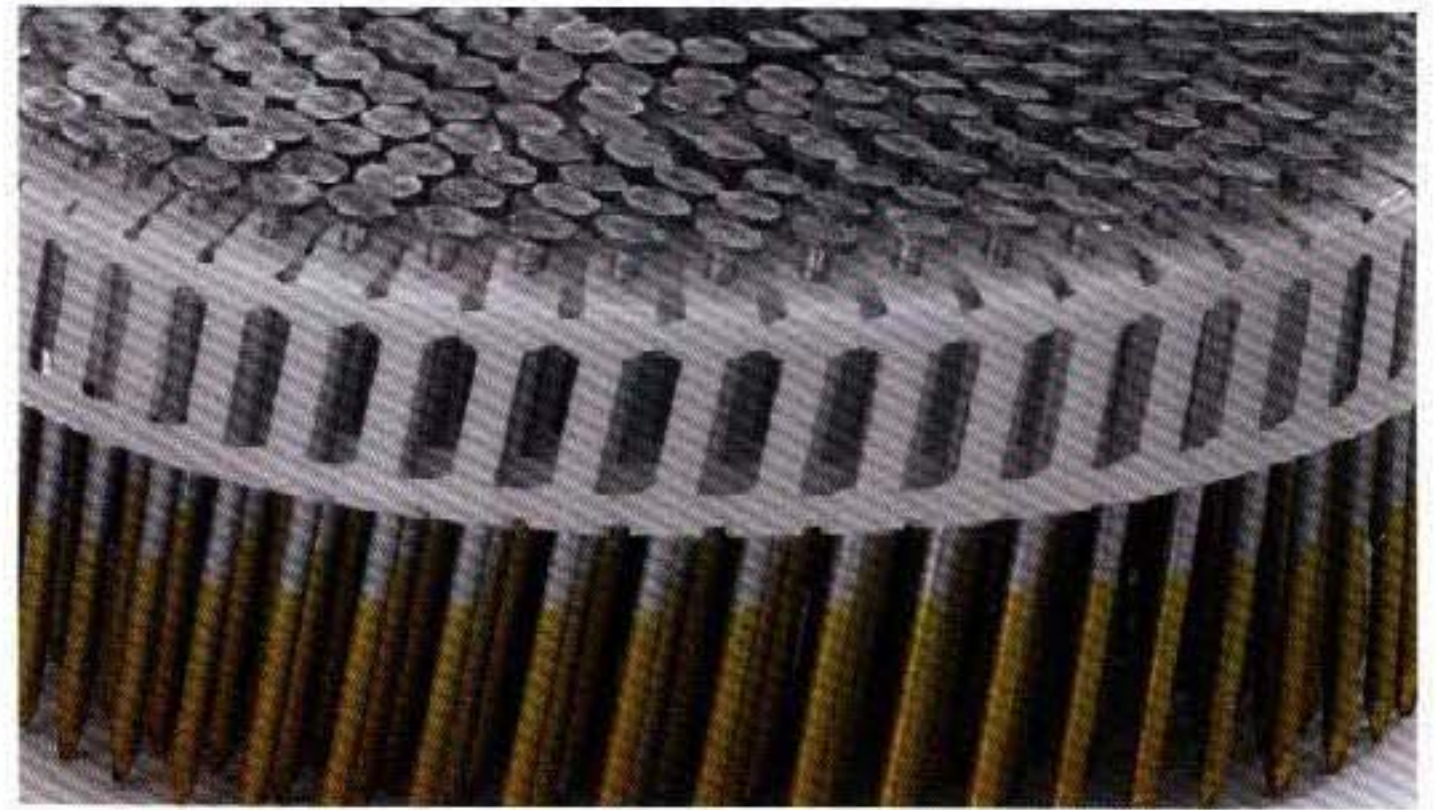

ALL SIZES AVAILABLE IN Smooth, Ring and Screw Shanks

Smooth Ring Screw



FOR USE IN THE FOLLOWING NAILERS:

Hitachi	NV65AH, NV65AHS, NV75AG
Bostitch	N66C
DuoFast	DF225C
Grip-Rite	GRTC250
Makita	AN611
Max	CN565S
Porter Cable	COIL250
Senco	SCN56



BULK

PRIMARY APPLICATION

Framing, Construction, Fiberglass/Shingle, Concrete, Decking, Siding

AVAILABLE SIZES

2D - 60D

AVAILABLE SHANKS

Smooth, Ring and Spiral

AVAILABLE POINTS

Based on customer requirement

AVAILABLE COATINGS

Bright, Electro Galvanized, Hot Dipped Galvanized, Stainless Steel (304 / 316)


AVAILABLE PACKAGING

50 LBS, 25 LBS, 5 LBS, 1 LB



AVAILABLE NAIL TYPES:

Common	Roofing
Box	Underlayment
Finish	Casing
Siding	Duplex
Decking	Drywall
Joist Hanger	Truss
Sinker	

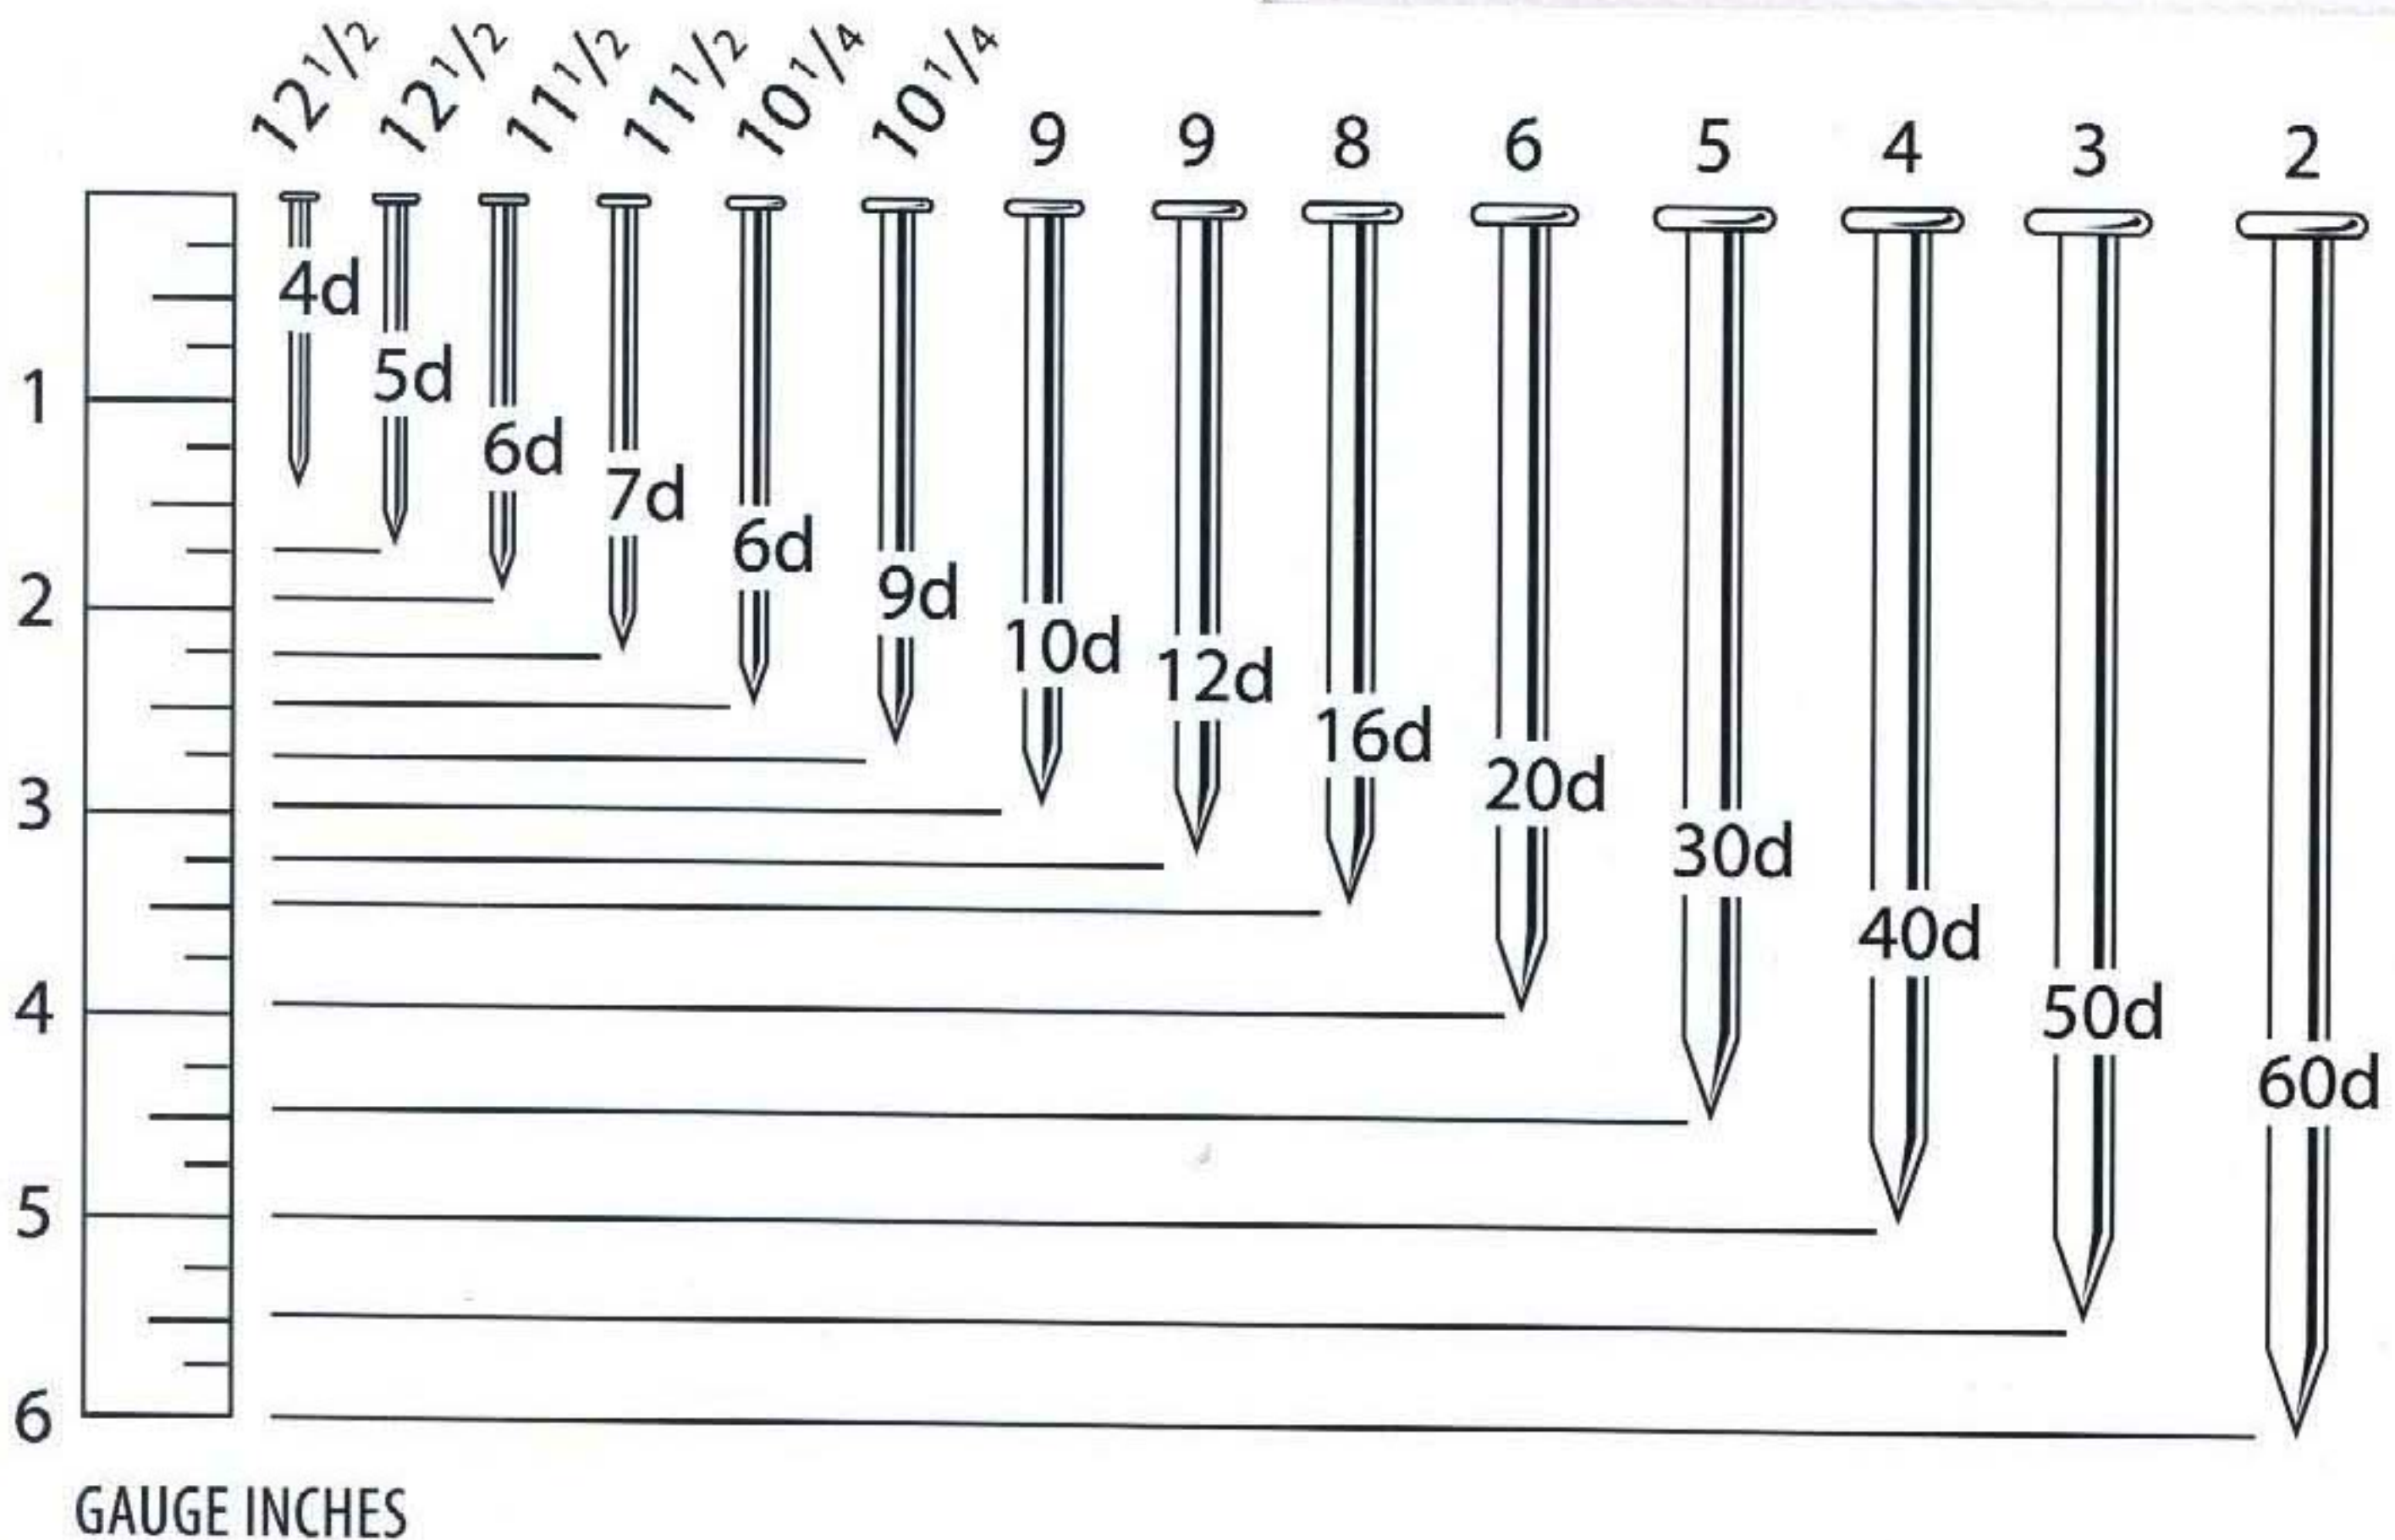

BULK NAILS

www.omanfasteners.com



Oman Fasteners

P.O. Box 585
Postal Code 322
Port of Sohar
Sultanate of Oman

Tel +968 2 685-0445
GSM +968 9 429-0403

Oman Fasteners (US Office)

1230 Peachtree St NE
Suite 1976
Atlanta, GA 30308
USA

Tel 1 404 942-2390